

ES SERIES

RELAY SOCKETS



**VEMER
SIBER**
GROUP

CUSTOM CONNECTOR



DESCRIPTION	8 Pin Slim Line Sockets, DIN Rail Mountable, Finger Safe
ELECTRICAL RATING	• 300 Volts, 10 Amps ; 300 Volts, 12 Amps
CONSTRUCTION	Contacts • Brass, Nickel Plated Screws • M3 Steel, Nickel Plated, Maximum Wire Gauge #14 Molding • Break Resistant Thermoplastic
AGENCY APPROVALS	• UL recognized, File No. E113714 • CSA certified, File No. LR42742 • CE

ORDERING CODE


PART NO.	DESCRIPTION	TERMINAL TYPE
ES50/3	DPDT, 8 Pin Slim Line	Box Lug

ACCESSORIES


PART NO.	DESCRIPTION (Refer to the accessories pages 25-27)
C-103-PM	Prepunched Aluminum DIN Rail (1 Meter Lengths)
C-104-PM	Prepunched Steel DIN Rail (1 Meter Lengths)
C-105-PM	Prepunched Steel DIN Rail (1 Meter Lengths)
C-106-2PM	Prepunched Steel DIN Rail (2 Meter Lengths)
C-108-PM	Prepunched Raised Aluminum DIN Rail (1 Meter Lengths)
C-108-2PM	Prepunched Raised Aluminum DIN Rail (2 Meter Lengths)
MS12	Hold Down Spring/Ejector
MS16	Hold Down Spring/Ejector
MS25	Hold Down Spring/Ejector

PLUG-IN INDICATOR AND PROTECTION MODULES

PART NO.	DESCRIPTION
Type 22	Diode for 6-230V DC (+Terminal A1)
Type 42V	Green LED with Diode for 6-24V DC (+ Terminal A1)
Type 42CV	Green LED with Diode for 110-230V DC (+ Terminal A1)
Type 52B	RC Circuit for 6-24V AC
Type 52C	RC Circuit for 110-240V AC
Type 62V	Green LED for 6-24V AC/DC (For DC + Terminal A1)
Type 92V	Green LED for 110-240V AC/DC (For DC + Terminal A1)
Type 62CV	Varistor + Green LED for 6-24V AC/DC (For DC + Terminal A1)
Type 92CV	Varistor + Green LED for 110-240V AC/DC (For DC + Terminal A1)
Type 102	Bypass Resistor 110-240V AC

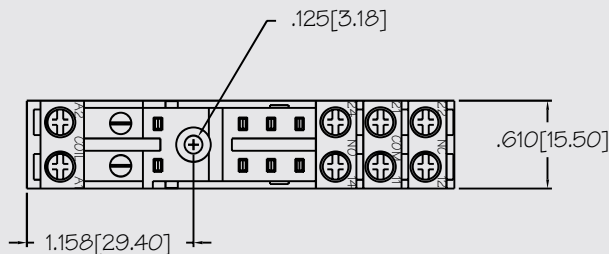

TERMINAL LOCATION

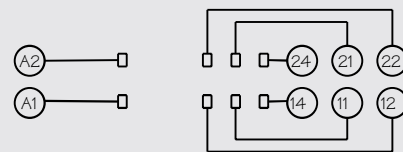

TOP VIEW

