


# ES SERIES

## RELAY SOCKETS

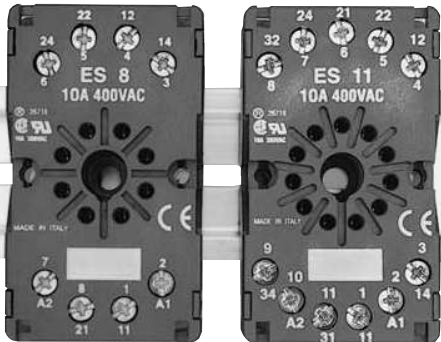

### DESCRIPTION

8 and 11 Pin Octal Sockets, DIN Rail Mountable, Finger Safe

### ELECTRICAL RATING

• 300 Volts, 10 Amps

### CONSTRUCTION

- Contacts** • Brass, Nickel Plated
- Screws** • M3 Steel, Nickel Plated, Maximum Wire Gauge #14
- Molding** • Break Resistant Thermoplastic

### AGENCY APPROVALS

- UL recognized, File No. E113714
- CSA certified, File No. LR26716
- CE



### ORDERING CODE

PART NO.	DESCRIPTION	TERMINAL TYPE
ES8	DPDT, 8 Pin Octal Style (Fig. 1)	Box Lug
ES11	3PDT, 11 Pin Octal Style (Fig. 2)	Box Lug

### ACCESSORIES

PART NO.	DESCRIPTION (Refer to the accessories pages 25-27)
C-103-PM	Prepunched Aluminum DIN Rail (1 Meter Lengths)
C-104-PM	Prepunched Steel DIN Rail (1 Meter Lengths)
C-105-PM	Prepunched Steel DIN Rail (1 Meter Lengths)
C-106-2PM	Prepunched Steel DIN Rail (2 Meter Lengths)
C-108-PM	Prepunched Raised Aluminum DIN Rail (1 Meter Lengths)
C-108-2PM	Prepunched Raised Aluminum DIN Rail (2 Meter Lengths)
HDB-13	Hold Down Spring
T	Marking Plate



Fig. 1

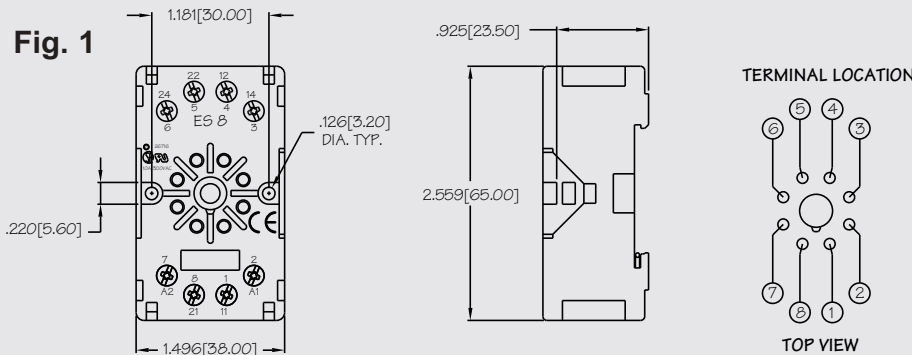


Fig. 2

