



# G SERIES

## TERMINAL BLOCKS

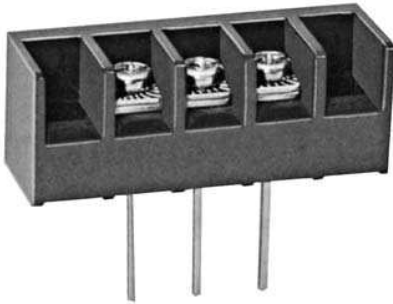

### CATALOG NUMBER CODE

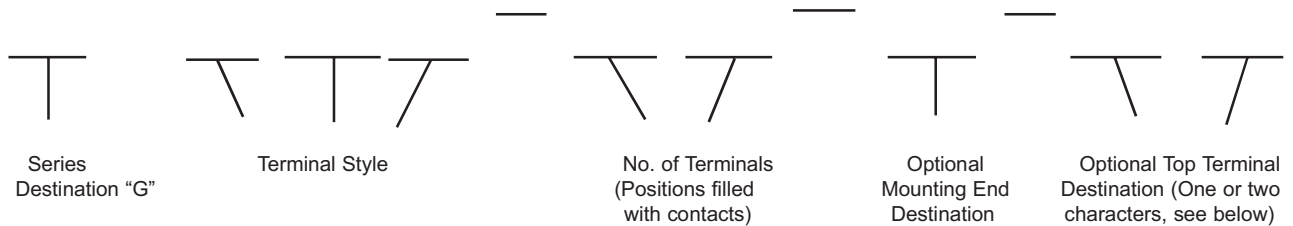

### TERMINAL STYLES

**PCB** = Printed Circuit Board  
**WWS** = Wire Wrap

**QDC** = Quick Disconnect  
**TSC** = Non Feed Through

**SLD** = Solder

### NUMBER OF TERMINALS

02-30; 01-28 when ordered with M, P or T mounting

### OPTIONAL MOUNTING END DESIGNATION

(Omit if not desired)

- M** = One open position on each end of block for mounting
- P** = One open position with a mounting plate on each end of block (.150 Dia. hole)
- T** = One open position with a 6-32 tapped mounting plate on each end of block

### OPTIONAL TOP TERMINAL DESIGNATION

(Steel binder head screws standard; no designation required if this is the desired termination type)

- X** = No Screws
- PC** = Pressure Clamps
- B** = Brass Binder Head Screws

### QUICK CONNECTS - BRASS:

- A** = .250 x .031 Flat
- C** = .250 x .031 45°
- D** = .250 x .031 90°
- E** = .250 x .031 Flat & 45°
- F** = .250 x .031 Flat & 90°
- G** = .250 x .031 45° & 90°
- H** = .250 x .031 Flat, 45° & 90°

When brass binder head screws are desired to secure the above quick connects, precede the letter designation with "B", ie: BA.