



- Small size and light weight.
- Low coil power consumption.
- High contact load.
- Strong anti-shock high reliability.

SPECIFICATIONS
Contact

Arrangement	3A,3B,3C
Contact Material	Silver alloy
Contact Resistance (By voltage drop 6V 1A)	Max. 50mΩ
Rating Nominal switching capacity Resistive load	30A 250VAC 30A 28VDC
Max. Switching Voltage	28VDC/250VAC
Max. Switching Current	30A
Max. Switching Power	7500VA/840W
Expected life (min. ope) Mechanical(at 120 cpm) Electrical (at 20 cpm)	1×10 ⁷ 1×10 ⁵

Characteristics

Operate Time	Max. 20msec.	
Release Time	Max. 15msec.	
Initial breakdown voltage Between coil & contact Between open contacts	2000VAC (50/60Hz) for 1 min. 1500VAC (50/60Hz) for 1 min.	
Insulation Resistance	Min. 100MΩ (500 VDC)	
Ambient temperature	-40°C ~ +70°C	
Operating humidity	45 to 85% RH	
Shock Resistance	Functional	Min. 10G
	Destruction	Min. 100G
Vibration Resistance	Functional	10 to 55 Hz at double Amplitude of 1.5mm
	Destruction	10 to 55 Hz at double Amplitude of 1.5mm
Unit weight	Approx. 125g	

COIL DATE


Coil Consumption	sensitive: 3.2VA/2W
Coil Voltage (1 pole)	6 - 110VDC
Coil Voltage (2 pole)	6 - 240VAC
Coil Resistance	see COIL SPECIFICATION below

UL/C-UL Rating

Resistive load (cosφ=1) Inductive load (cosφ=0.75 - 0.8)	3A,3B,3C	
	30A	250VAC 28VDC

COIL SPECIFICATION (at 20°C)




Type	Nominal Voltage (VDC) (VAC)	Coil Resistance (Ω)	Nominal operating power (W)	Pick-up Voltage	Drop-out Voltage	Max. Allowable Voltage
AC	6	3.3	abt. 3.2VA (50 - 60Hz)	75% Max.	30% Min.	120%
	48	210				
	240	4500				
DC	6	18.5	abt. 2W	75% Max.	10% Min.	120%
	12	74				
	24	300				
	36	665				
	48	1200				
	60	1800				
	72	2660				
	90	4160				
100	5140					
	110	6220				

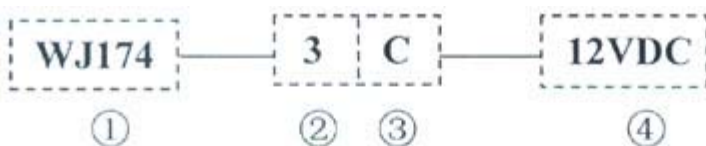ORDERING INFORMATION


① Type	② Number of pole	③ Contact form	④ Coil voltage
WJ174	3 : 3pole	A: Form A	Coil: 6-110VDC 6-240VAC
		B: Form B	
		C: Form C	

DIMENSIONS Unit: mm

WJ174-3Pole Plug terminal

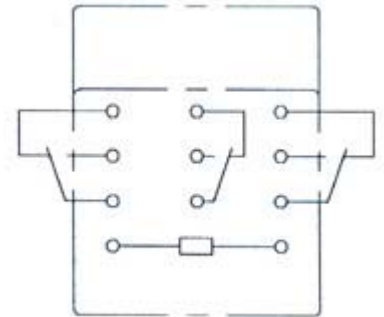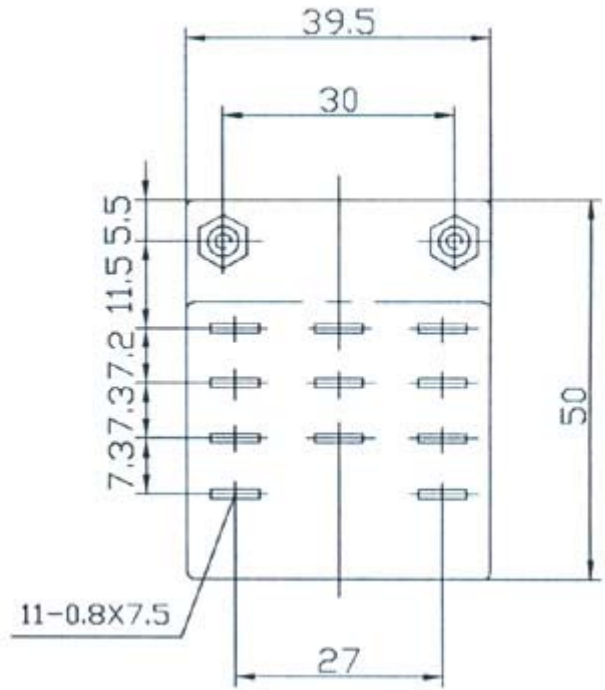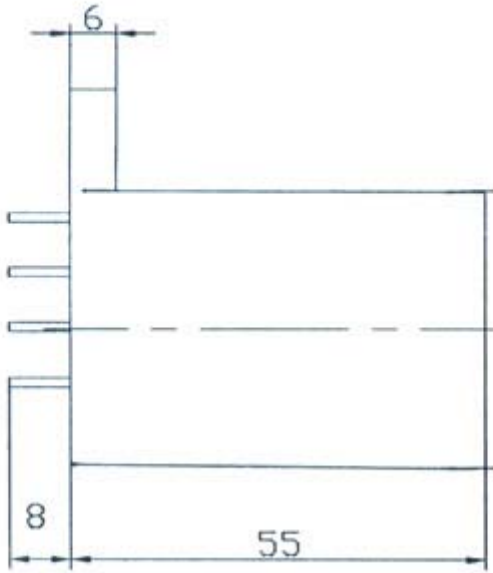

Quality policy:

Today's quality is our future market;
Our goal is pursuing Vendor satisfaction.

Environmental policy:

Keeping the system safe, Abiding by laws;
Innovation in technology, Prevention of pollution;
Advertising & education, Continuous improvement.

Note: The



as for the specification will not be advised in the future.

www.jaxxeninc.com

info@jaxxeninc.com