




YCPK

Relays for advanced technology

ULTRA-MINIATURE
PC BOARD TYPE
POWER RELAYS

WJ118-RELAYS



- 20A Switching capabilities
- Subminiature,stand PC layout
- High resistance to vibration
- Low power consumption 0.6W only.
- Main Application in Automotive Industry

SPECIFICATIONS

Contact

Arrangement	1A; 1B; 1C
Contact Material	Silver alloy
Contact Resistance (By 6V 1A)	Max.100mΩ
Rating Nominal switching capacity Resistive load	5A 250VAC 7A 125VAC 20A 14VDC
Max. Switching current	20A
Max. Switching current	35A/2min, 25A/1h
Inrush current	Max.60A
Expected life(min.ope) Mechanical(at 180 cpm) Electrical (at 20 cpm)	1×10^7 1×10^5

Characteristics

Operate Time	Max.10msec.	
Release Time	Max.5msec.	
Initial breakdown voltage Between coil & contact Between open contacts	500VAC (50/60Hz)for 1 min 500VAC (50/60Hz)for 1 min	
Insulation Resistance	Min.1000MΩ (500VDC)	
Ambient temperature	-40°C ~ +85°C	
Operating humidity	35 to 95% RH	
Shock Resistance	Functional	Min. 10G
	Destruction	Min. 100G
Vibration Resistance	Functional	10 to 55 Hz at double Amplitude of 1.5mm
	Destruction	10 to 55 Hz at double Amplitude of 1.5mm
Unit weight	Approx.3.7g	

Coil DATE

Coil Consumption	sensitive:0.6W
Coil Voltage	3 - 48VDC
Coil Resistance	see COIL SPECIFICATION below


COIL SPECIFICATION (at 20°C)

Nominal Voltage (VDC)	Coil Resistance (Ω)±10%	Nominal operating power (W)	Pick-up Voltage (VDC)	Drop-out Voltage (VDC)	Max.Allowable Voltage (VDC)
3	15	abt 0.60	75% Max.	5% Min.	130% of nominal Voltage
5	41.6				
6	60				
9	135				
12	240				
18	600				
24	960				
48	3840				


ORDERING INFORMATION





① Type	② Number of pole	③ Contact form	④ Coil voltage(DC)
WJ118	1:1pole	A : form A B : form B C : form C	3, 5, 6, 9 12, 18, 24V, 48

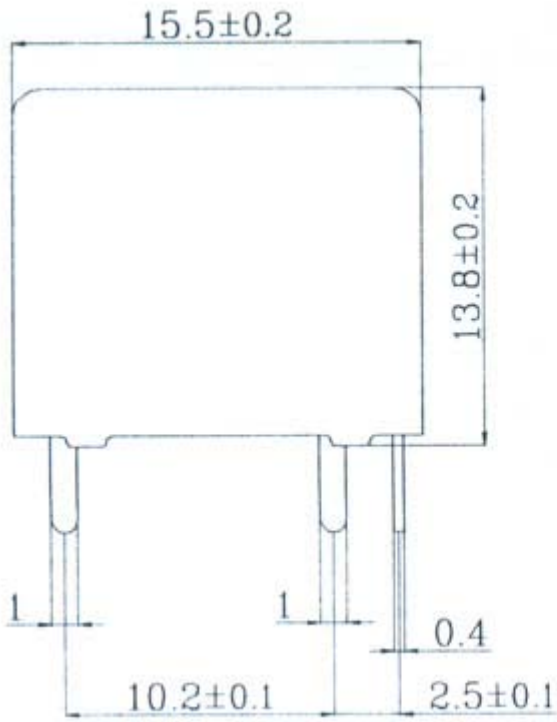

BOTTOM VIEW

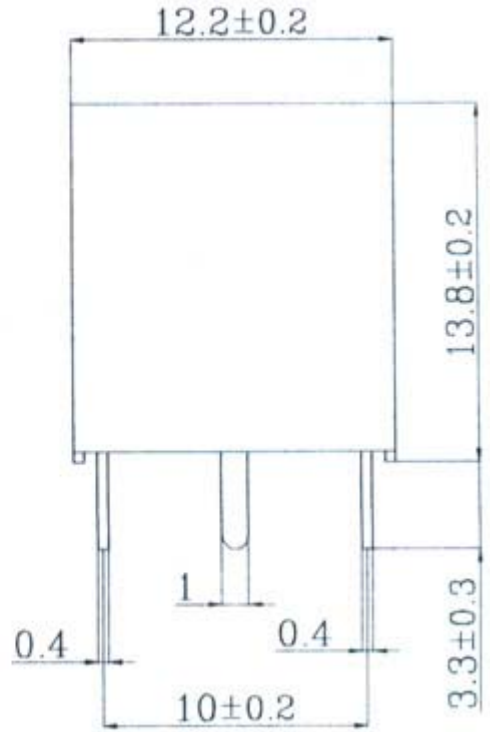

BOTTOM VIEW

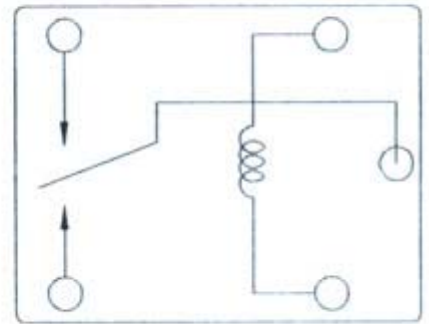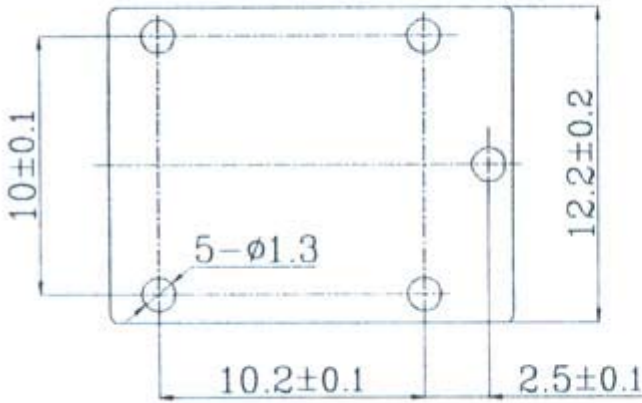

pattern of printing



Packing



MEAS: 360x255x240mm
 100pcs per plastic tray;
 5pcs plastic trays per inner carton;
 4pcs inner carton per outer carton;
 2000pcs Relays for total per outer carton;
 weight: Approx 13.5Kg;

Quality policy:

Today's quality is our future market;
 Our goal is pursuing Vendor satisfaction.

Environmental policy:

Keeping the system safe, Abiding by laws;
 Innovation in technology, Prevention of pollution;
 Advertising & education, Continuous improvement.