


SS001 SERIES

MINIATURE SLIDE SWITCH

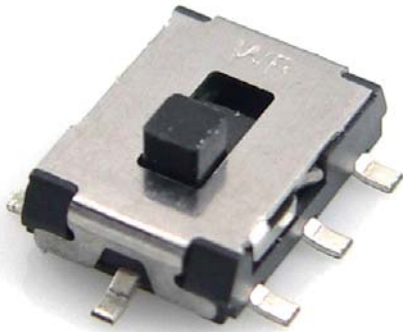

Feature -

- compact size
- reflow soldering available


Application -

- consumer products
- computer products
- instrumentation
- communication equipments
- hand-held devices

► SPECIFICATIONS


SWITCH SPECIFICATIONS	
POLE - POSITION	3P2T , SMT TYPE
CONTACT RATING	6 V DC , 0.3 A
CONTACT RESISTANCE	50 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	200 ± 150gf
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C
TOTAL TRAVEL	2.0 ± 0.2 mm

► HOW TO ORDER

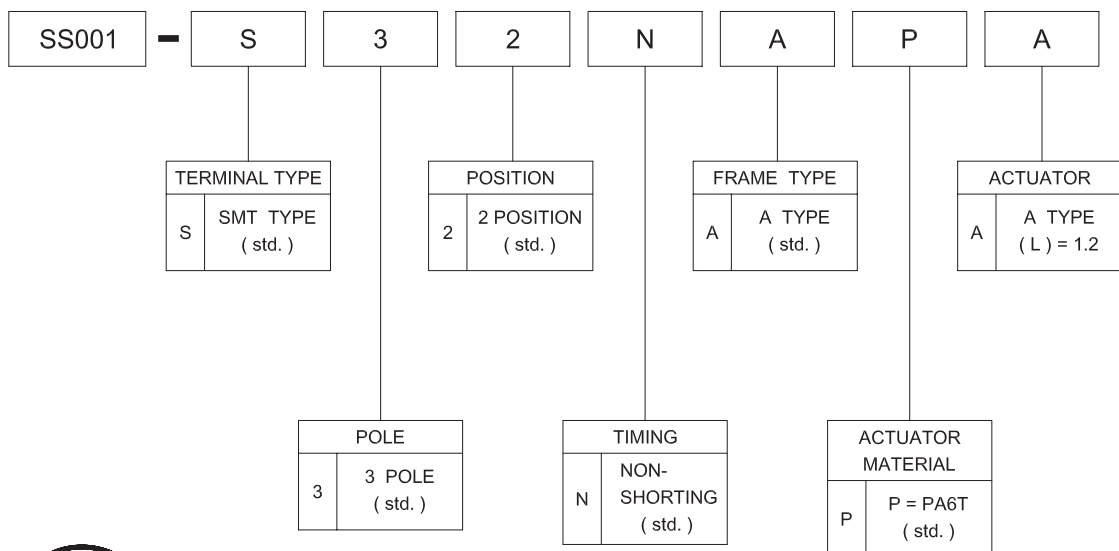


► DIMENSION


► SS001-S32NAPA

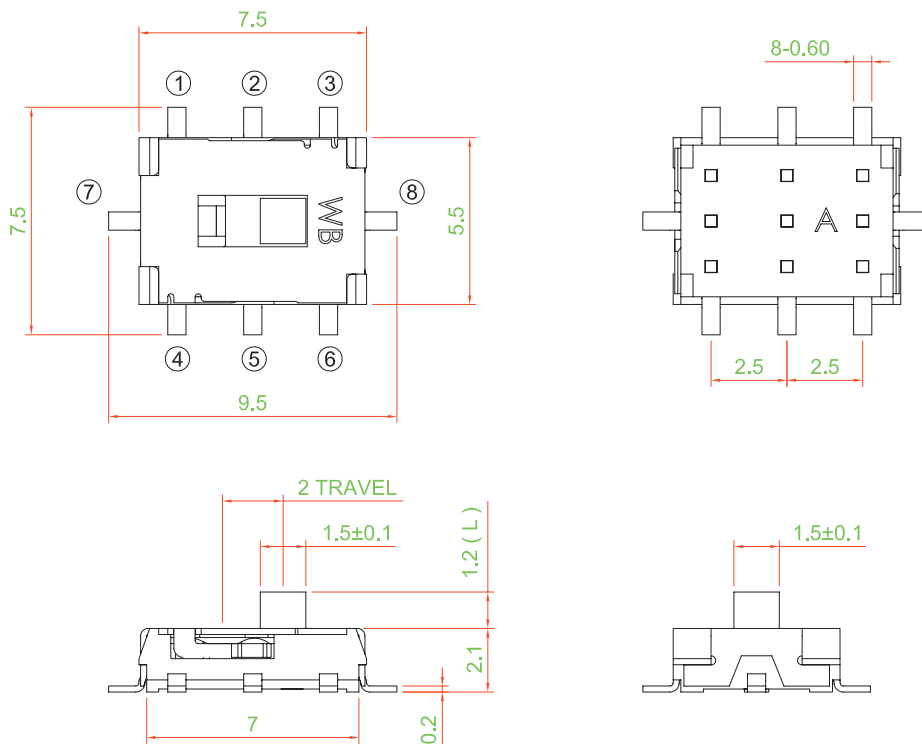


► CIRCUIT DIAGRAM

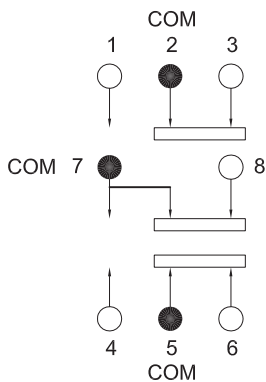

► P.C.B. LAYOUT

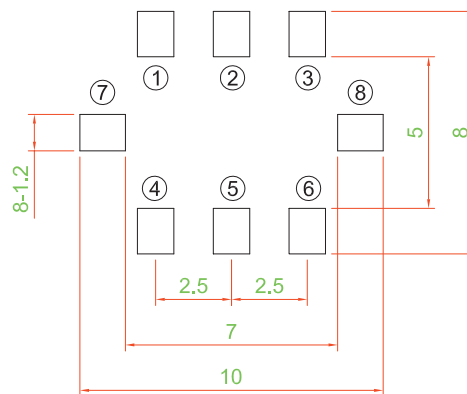

► REFLOW SOLDERING

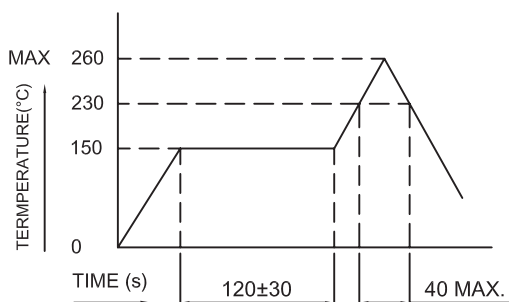

► MATERIAL

- COVER : STAINLESS STEEL
- ACTUATOR : PA + GF
- BASE FRAME : PA + GF
- TERMINAL : SILVER PLATING

► UNIT WEIGHT

- SS001 : 0.2 ± 0.01 g / pc